

1024Wh Power Station




Instruction Manual


.....	Warnings & Safety Information
.....	Before First Use
.....	Box Contents
.....	Product Diagram.....
.....	LCD Screen Description
.....	Usage Instructions.....
.....	Charging Instructions
.....	Other Functions
.....	FAQ
.....	Error Codes
.....	Maintenance
.....	Specifications.....
.....	Warranty Information.....




Power Station



12V Charging Cable





Solar Charging Cable




Mains Charging Cable



User Manual

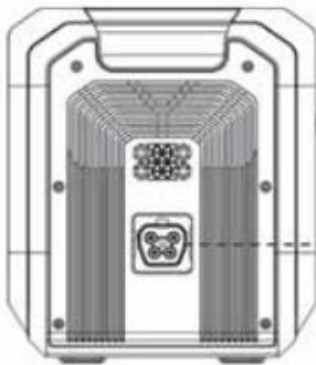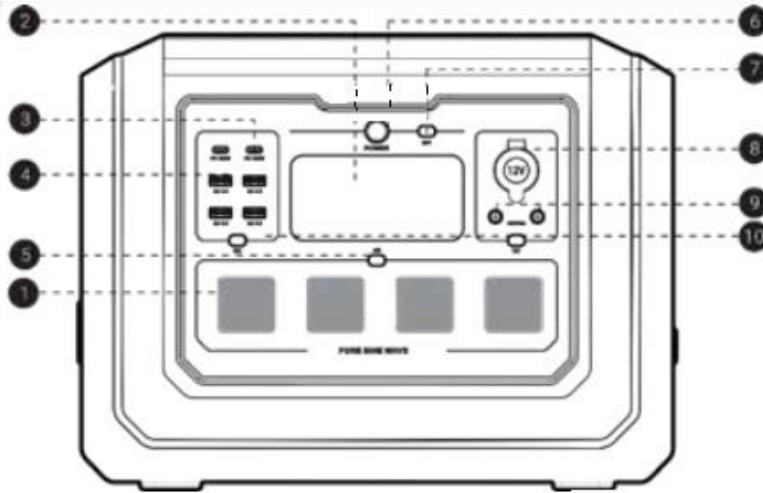


1. AC Outputs
2. LDC Display
3. 100W PD USB-C Outputs
4. QC 3.0 USB-A Outputs
5. AC Output Switch
6. Main Power Switch
7. 12V Cigarette Socket Output
8. DC5521 Outputs
9. DC Output Switch
10. Extended Battery Socket
11. High Current DC Input

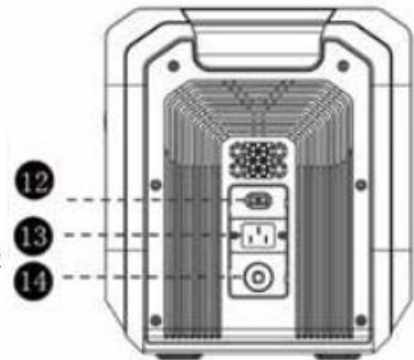

- 12
- 13
- 14


LCD SCREEN DESCRIPTION

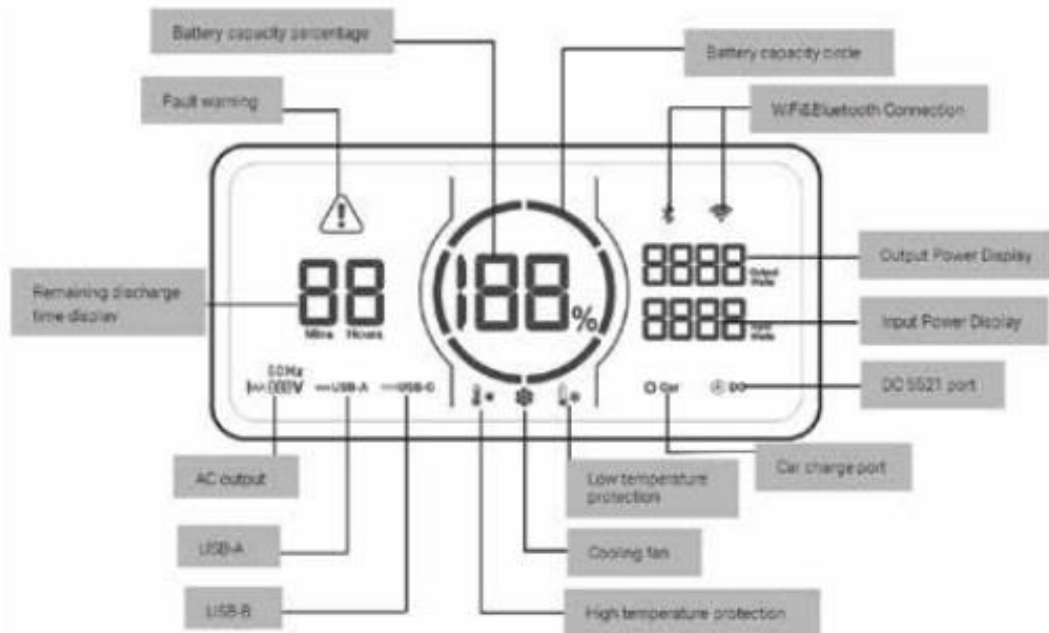

USAGE INSTRUCTIONS

LCD battery capacity circle indicates battery level. The capacity circle is divided into six sections, accounting for approximately 17%~35%~51%~68%~85%~100% of the capacity. When in use, the LCD display automatically wakes up. When discharging, the blue capacity segment disappears from the display, indicating remaining capacity. When charging, the blue battery capacity circle flashes clockwise along the trajectory, which indicates that the device is currently charging. The number on the right side of the energy circle now displays the real-time input power. After full charging, all blue capacity segments will be illuminated and keep in stable. After charging is completed, please unplug the charger.

Press and hold the power button, the product will turn on, the LCD screen will light up, and the power button indicator light will turn to a steady state; press and hold the power button for about 3 seconds or more, the LCD screen will display the word "off" and then release it, the product will shut down, and the LCD display will turn off. When the main power button is turned on, lightly press the switch button of each functional area, and the corresponding function icons on the LCD screen will light up at the same time. At this time, the functions in this area can be used normally; tap the corresponding functional area button again, and the corresponding LCD screen icons will turn off. This area function stops working.

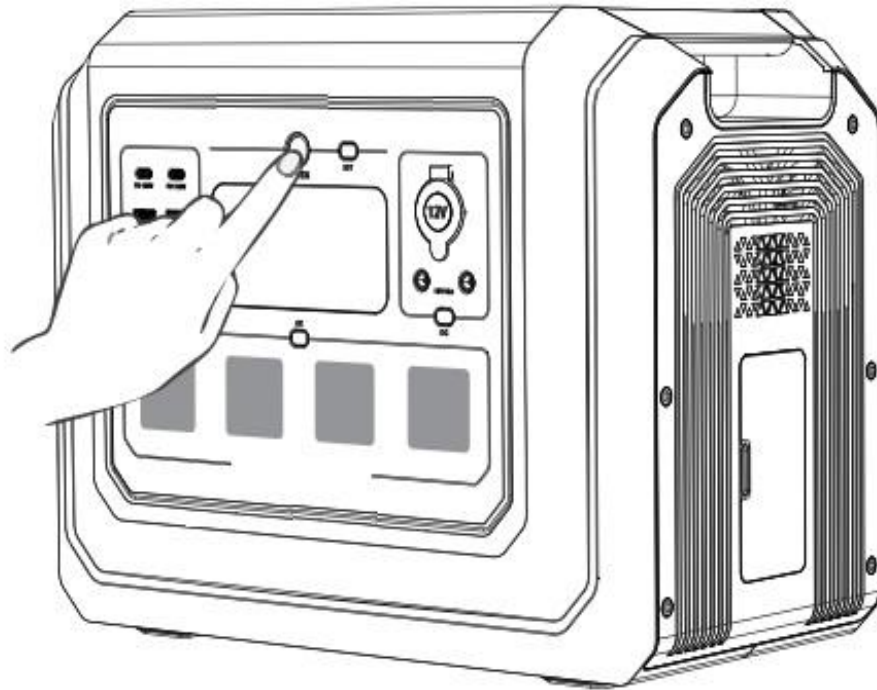


NOTE: After the product is turned on, short press the main power button. The LCD screen will turn off but the product will not shut down. If the product is not operated within 5 minutes, the product will automatically shut down.

NOTE: The default standby time of this product is 6 hours. If other output power keys are not turned on and no load is connected to the product, the product will automatically shut down after 6 hours. If the product is not operated within 5 minutes, the product will enter sleep state and the LCD screen will automatically turn off. When the product has load changes or operations, the LCD screen automatically lights up. The standby time can be set on the APP.

NOTE: In high-temperature environments, it is recommended to use loads below 1600W when the capacity is discharged from 100% to 30%. Otherwise, it may trigger the high-temperature protection of the battery cells.


CHARGING INSTRUCTIONS

AC Charging

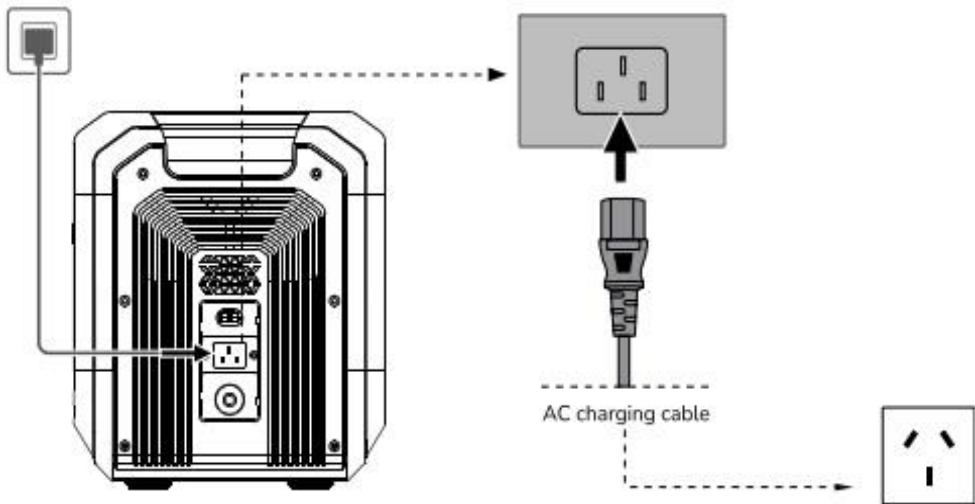

When the AC output of the product is turned off, the switch is in the 'SLOW' position for slow charging with an input power of 700W, and the switch is in the 'Fast' position for fast charging with an input power of 1400W;

NOTE: The product's fast and slow charging function must be turned off when switching.

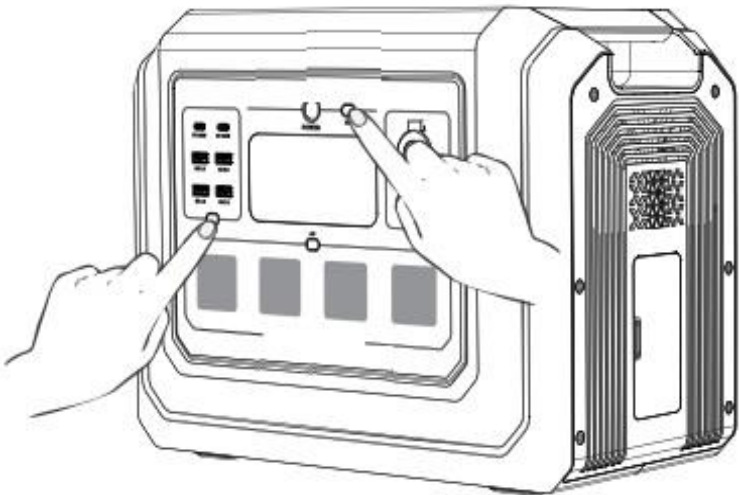


Solar Charging

Use the included solar cable to connect a 12V solar panels to the device. Up to 3 standard solar panels can be connected.

NOTE: When using a suitable solar panel to charge this product, please make the connection according to the user manual specifications.


WARNING: Before connecting the solar panel, please confirm that the output open circuit voltage specification of the solar panel is within 80V to avoid damage to the product.

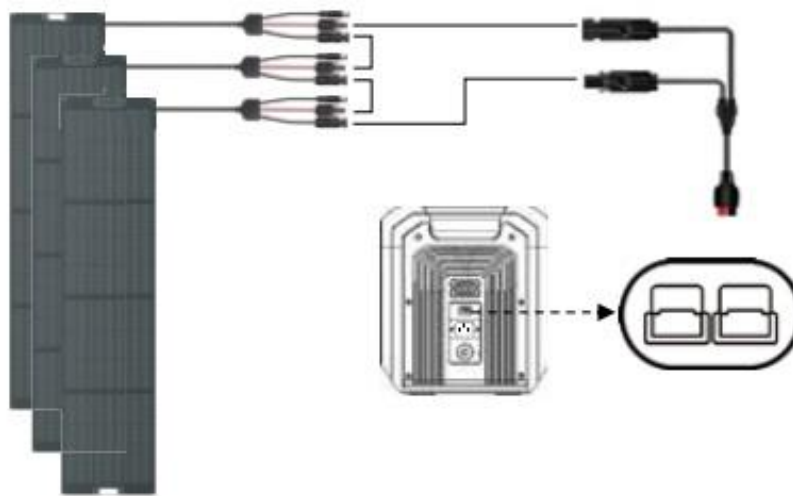

Car Charging

Use the car charger port of your vehicle to charge this. At the same time, ensure that the car charger port and the cigarette lighter of the car charger input cable are in good connection.

NOTE: For protecting the car battery from losing power and unable to start, it is necessary to use the car charger to charge after the car is started.

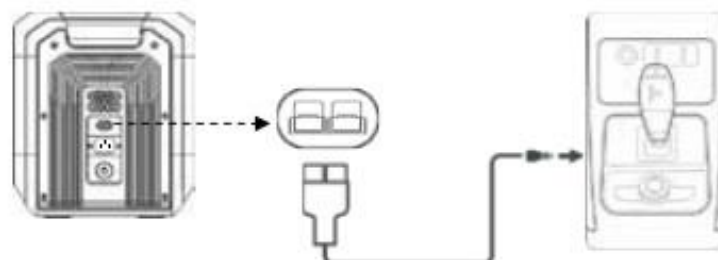

FAQ

1. What type of battery does the product use?

This product uses high-quality lithium iron phosphate batteries.

2. What equipment can be connected to the AC output port of the product?

The AC output port of this product has a rated power of 2000W and a peak power of 4500W. It can power most household appliances. However, it is recommended that you confirm the power of the appliance before use and ensure that the sum of the power of all load devices is less than the rated power.

3. How to know how long the product can provide power?

The LCD screen of this product will display the battery life, and devices with stable power consumption can be estimated based on this time.

4. How to tell if the product is charging?

When charging, the LCD screen will display the remaining charging time, and the power indicator circle outside the battery power percentage will begin to rotate in a circular motion, and the input power will be displayed.

5. How to clean this product?

Please use a dry, soft, clean cloth or paper towel to wipe this product.

6. How to store the product?

When storing, please turn off this product first and then store it in a dry, ventilated place at room temperature. Do not place this product near water and fire sources. During long-term storage, it is recommended to charge and discharge the battery every three months to extend the service life of this product.




















7. Can this product be brought on board a plane?












No.

8. Is the actual output capacity of the product consistent with the capacity specified in the user manual?

The capacity indicated in the user manual is the rated capacity of the battery pack of this product. Since this product has a certain efficiency loss during the charging and discharging process, the actual output capacity of the product is lower than the capacity specified in the user manual.

ERROR CODES

FAULT CODE	FAULT INFORMATION	STATUS	REMARKS
E000	AC output short circuit protection	Flashing, no output  	Press the AC output power on/off button for recovery
E001	Output overload protection	Flashing, no output   	Flashing icons indicates which circuit overload. Overload protection needs to be restored manually, UPS function overload 2000W 1 sec.
E002	AC Battery low voltage protection	The corresponding function icon flashes and the corresponding port has no output.	After protection, restart corresponding function keys to restore functions, and recharge it timely
E003	AC output over-voltage and low voltage protection	Flashing, no AC output 	You need to manually press the AC power button to recover
E004	Abnormal AC input frequency	Flashing, no output 	Automatically recover when frequency is normal
E005	High and low bus voltage, over-current	Flashing, no output at all ports 	You need to manually press the AC power button to recover
E006	Inverter over-temperature charging over-temperature protection	Flashing, no output   	Temperature lower down to normal level, it will recover automatically
E010	Overload and short circuit of the cigarette lighter socket	Flashing, no output   	You need to manually press the DC power button to recover
E011	Overload and short circuit of the USB-A port	Flashing, no output at all ports  	You need to manually press the DC power button to recover
E012	Overload and short circuit of the USB-C port	Flashing, no output at all ports  	You need to manually press the DC power button to recover
E016	Overvoltage of the inverter input battery	E016 code +  Flashing	You need to manually press the DC power button to recover

FAULT CODE	FAULT INFORMATION	STATUS	REMARKS
E020	BMS communication failure	Flashing, no output at all ports 	Check BMS communication cable
E021	Battery cell high voltage alarm	E021 code flashing	Set the device aside and wait for the battery voltage to recover automatically
E022	Battery cell low voltage alarm	Battery capacity percentage flashing	Connect the AC charging cable and keep charging until the voltage is normal
E023	Total battery voltage is too high	E23 code flashing but output is normal	Set the device aside and wait for the battery voltage to recover automatically
E024	Total battery voltage is too low	Flashing, no output at all ports 	Connect the AC charging cable and keep charging until the voltage is normal
E025	Battery high temperature	Flashing, no output at all ports  	Automatically resumes after temperature recovery
E026	Battery low temperature	Flashing, no output at all ports  	Automatically resumes after temperature recovery
E027	System overload	Flashing, AC output close, DC output is normal, the AC load is higher than 2100W or AC+DC load is higher than 2100W 	You need to manually press the AC power ON/OFF button to recover
E028	Charging over-temperature	Flashing, charging stop  	Automatically resumes after temperature recovery
E029	MOSFET over-temperature	Flashing, no output at all ports  	Automatically resumes after temperature recovery
E030	Abnormal battery pack connection	Battery pack connection error	Please replace with the standard battery pack

MAINTENANCE

1. Please store the product away from water sources, heat sources, and metal objects.
2. In order to extend the service life of the battery, it is recommended to use or store this product in an environment of 20C to 30°C.
3. If long-term storage is required, please charge and discharge this product once every 3 months (first discharge to 0%, then fully charge, then discharge to 60% for long-term storage); products that have not been charged or discharged for more than 6 months warranty will not be provided.
4. For safety reasons, do not store this product in an environment above 45°C or below -10 C for a long time.
5. If the product is seriously low on power and idle for too long, the product will enter deep sleep mode, and the product must be charged before use again.

SPECIFICATIONS

Model	S01	
AC Output	Rated Voltage	230VAC
	Rated Power	2000W
	Peak Power	4500W
	Frequency	50Hz
DC 12V & Car Lighter Output	Rated Voltage	12V
	Rated Current	10A
USB-A Output	5V/3A; 9V/2A; 12V/1.5A [18W Max]	
USB-C Output	5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/5A [100W Max]	
AC Charge Input	190~250Va.c 6.5A 1400W	
Solar Input	12~80Vd.c MPPT:18-75V/14A 800W Max	
Car Lighter Input	12~15Vd.c 8A	
Rated Capacity	1024Wh	
Rated Voltage	51.2 Vdc	
Battery Type	LiFePO4	
IP Grade	IP21	
Working Temperature	0°C~40°C	
Dimension	384 x 232 x 295mm	
Net Weight	12.6kg	